

CM-1000 Microphone SPECIFICATIONS:

ELEMENT: Fixed-charge back plate, condenser

CHANNEL: Monaural

FREQUENCY RESPONSE: 100 ~ 10K Hz

DIRECTIVITY: Omnidirectional

OPEN CIRCUIT SENSITIVITY: $-54 \pm 3\text{dB}$ (0dB=1V/Pa. 1KHz RL=2.2K Ω)

IMPEDANCE: Low Impedance

CURRENT CONSUMPTION: Max 0.5mA

STANDARD OPERATION VOLTAGE: 3V

SENSITIVITY REDUCTION: Within -3dB at 1.5V


SIGNAL-TO-NOISE RATIO : >60dB 1 kHz at 1 Pa

CORD LENGTH: 8 Feet

EXTERNAL CONNECTING METHOD: 3.5mm Stereo Jack

PLUG TYPE: 3.5mm Stereo Straight Plug

Dimensions

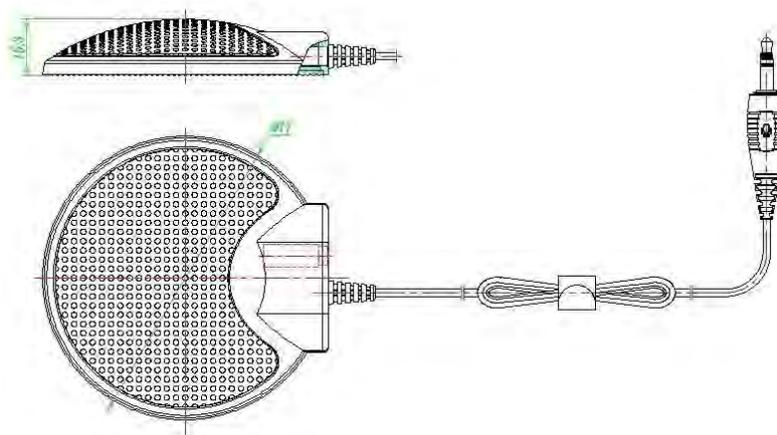

Typical Frequency Response Curve

