


## **X-keys® SE Editor** USB Keyboard with Jog & Shuttle control (XPS-08-USB)

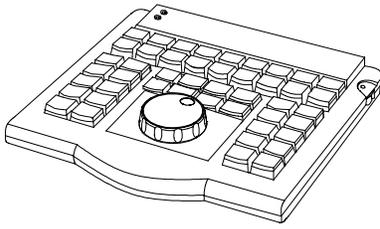

- Designed for professional digital video editors using a non-linear editing program
- Jog control makes frame by frame selection of edit points precise and intuitive
- Shuttle wheel has 14 programmable zones
- Includes X-keys Macro Maker Software

The **X-keys Editor** uses X-keys Macro Works software to record key commands from the keyboard and send them to applications on the computer. Any sequence or combination of keystrokes from a standard keyboard may be assigned to any key or control on the X-keys. Mouse commands (click, scroll, cursor movement) may also be programmed.

Simple, intuitive steps allow even non-technical users to program the X-keys instantly. Programming files may easily be copied, shared, and locked to prevent alteration.

Adjustable back-lighting makes key legends readable in low light working environments. Developers may use our special HID input mode to gain exclusive access to all 46 keys, the layer indicator LEDs, the programming switch, and jog and shuttle data. A software development kit is available.

### **Specifications**

<b>Operating System</b>	Windows 98SE, Me, 2000, XP
<b>Included Software</b>	Macro Works (required for programming and operation)
<b>Jog Control</b>	10 detent, independent clockwise and counter clockwise commands
<b>Shuttle Control</b>	Programming positions: left 1-7, rest, right 1-7 (spring return to rest)
<b>Switch Type</b>	Cherry type MX mechanical switch, 3/4" (19 mm) on center, silent tactile feel
<b>Number of Keys</b>	46 single keys
<b>Key Cap Type</b>	5/8" (16 mm) sq. w/removable clear caps for easy labeling (fits Cherry MX switch)
<b>Connector</b>	USB "A"
<b>Dimensions</b>	Body: 9" x 8" x 1" (230 mm x 200 mm x 25 mm)
<b>Weight</b>	17½ oz. (620 grams)
<b>Power Source</b>	USB port, nominal voltage = 5 vdc
<b>Power Consumption</b>	Low power USB device -- with back-lighting off: less than 15 ma @ 5 vdc -- with back-lighting on highest setting: less than 90 ma @ 5 vdc
<b>Accessories Included</b>	Double-keys (one horizontal and two vertical), key puller
<b>Optional Accessories</b>	Large 1-3/8" (35 mm) square keys (replace 4 single keys), additional double-keys
<b>Certifications</b>	FCC class B, CE pending

Specifications subject to change without notice