


X-keys® SE Switch Interface USB (XSI-38-US)

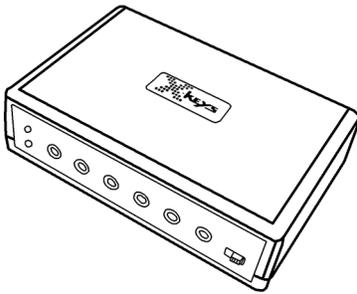

- Includes X-keys Macro Works Software
- Rugged construction
- Program switches to perform mouse functions
- 12 inputs for industry standard 3.5mm mono plugs

The Using the same reliable hardware as our X-keys Programmable Keyboards, the **X-keys Switch Interface** uses X-keys Macro Works software to record key commands from the keyboard and send them to applications on the computer. Any sequence or combination of keystrokes from a standard keyboard may be assigned to any key on the X-keys. Mouse commands (click, scroll, cursor movement) may also be programmed. Simple, intuitive steps allow even non-technical users to program the X-keys instantly. Programming files may easily be copied, shared, and locked to prevent alteration.

The USB X-keys may also be operated in Memory Resident Mode, saving all programming in an onboard non-volatile memory.

Specifications

Operating System	Windows 98SE, Me, 2000, XP
Included Software	Macro Works (required for programming and operation)
Number of Inputs	12 mono jacks
Input Connector	3.5mm mono plug (not included)
Output Connector	USB "A" plug
Dimensions	4.5" x 3.125" x 1.25" (115 mm x 80 mm x 32 mm)
Weight	6.8 oz. (210 grams)
Power Consumption	Low power USB device, less than 15 ma @ 5 vdc
Power Source	USB port power, nominal voltage = 5 vdc
In Memory Resident Mode	
Hardware System	Any architecture supporting USB, including Sun, SGI, and HP workstations
Operating System	Programming requires driver (included) for Windows 98, Me, 2000, XP. Operates on any OS supporting USB including Unix, Sun and Mac OS-X
Memory Capacity	Each matrix point is allocated 3 characters and a pool of 560 additional keystrokes is available to any switches requiring additional characters
Memory Type	EEPROM, non volatile memory (X-keys retains memory for over 200 years)
Number of Layers	2 layers – user selectable toggle and/or shift keys
Optional Accessories	Buddy Button, Big Buddy Button, and Treadle Pedal Switches (look for accessories in the P.I. Engineering online store)

Specifications subject to change without notice

P.I. Engineering

101 Innovation Parkway, Williamston, Michigan 48895-1663
 Phone: 800/628-3185 or 517/655-5523, Fax: 517/655-4926
www.xkeys.com